


Costruzione valvole e raccorderia in acciaio inox

**TEE A SALDARE 3A LUCIDO (Ra < 0,5 µm)**

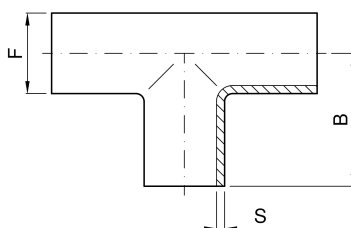

<b>codice</b>	<b>DN</b>	<b>F</b>	<b>S</b>	<b>A</b>	<b>B</b>	
	<b>inch</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>kg</b>
5.440.MM.03-B	½	12,7	1,65	38,1	76,2	0,06
5.440.MM.07-B	¾	19,05	1,65	47,6	95,2	0,07
5.440.MM.11-B	1	25,4	1,65	47,6	95,2	0,08
5.440.MM.24-B	1 ½	38,1	1,65	57,2	114,4	0,16
5.440.MM.44-B	2	50,8	1,65	76,2	152,4	0,25
5.440.MM.58-B	2 ½	63,5	1,65	76,2	152,4	0,35
5.440.MM.70-B	3	76,1	1,65	82,6	165,2	0,50

<b>codice</b>	<b>DN</b>	<b>F</b>	<b>S</b>	<b>A</b>	<b>B</b>	
	<b>inch</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>kg</b>
5.440.MM.76-B	4	101,6	2,11	98,5	197	0,90