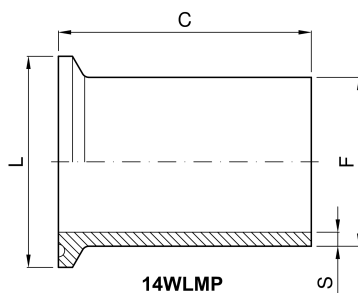


**3A (Ra < 0,5 µm) CLAMP long-WELDING FERRULE**


| <b>codice</b> | <b>DN</b>   | <b>L</b>  | <b>F</b>  | <b>C</b>  | <b>S</b> | <b>Peso</b> |
|---------------|-------------|-----------|-----------|-----------|----------|-------------|
|               | <b>inch</b> | <b>mm</b> | <b>mm</b> | <b>mm</b> |          | <b>kg</b>   |
| 4.560.LM.03-B | ½           | 25,4      | 12,7      | 50,8      | 1,65     | 0,04        |
| 4.560.LM.07-B | ¾           | 25,4      | 19,05     | 50,8      | 1,65     | 0,04        |
| 4.560.LM.11-B | 1           | 50,4      | 25,4      | 76,2      | 1,65     | 0,13        |
| 4.560.LM.24-B | 1 ½         | 50,4      | 38,1      | 76,2      | 1,65     | 0,13        |
| 4.560.LM.44-B | 2           | 64        | 50,8      | 76,2      | 1,65     | 0,20        |
| 4.560.LM.58-B | 2 ½         | 77,4      | 63,5      | 76,2      | 1,65     | 0,29        |
| 4.560.LM.70-B | 3           | 90,9      | 76,1      | 101,6     | 1,65     | 0,37        |

| <b>codice</b> | <b>DN</b>   | <b>L</b>  | <b>F</b>  | <b>C</b>  | <b>S</b> | <b>Peso</b> |
|---------------|-------------|-----------|-----------|-----------|----------|-------------|
|               | <b>inch</b> | <b>mm</b> | <b>mm</b> | <b>mm</b> |          | <b>kg</b>   |
| 4.560.LM.76-B | 4           | 118,8     | 101,6     | 101,6     | 2,11     | 0,42        |